

All internal duct runs must be inside the insulated envelope.

Notes:

Zehnder ComfoAir Q350 fitted with ComfoWell attenuators.

Ducting to External:

Zehnder ComfoPipe
I/D = 160 mm
O/D = 190 mm

Ducting to Internal:

Zehnder ComfoTube 90mm all runs to be completely inside the insulated envelope

Internal Grilles: All ceiling and wall grilles. Indicated location is suggestion only for best practice.

External Grilles: Location to be confirmed - Zehnder Stainless steel with rodent mesh wall mounted.

Design is suggested only and does not resolve if space is available or not. Please check dimensions to ensure all will fit. Some co-ordination with the builder may be required to ensure installation is completed as required.

Plumbing connection required. Please add to the plumbing plan for plumber to complete and connect.


Electrician to supply and install matching switches to Bathrooms - Press Mech type.

Data cable to be run from Bathroom boost switches to the plant room.

Data cable to be run from control panel location (owner to direct) to the plant room also.

Internet port on the wall next to the unit is favorable to connect the LAN Kit to allow access to the Zehnder app

Quote does not include Freight and Installation Price

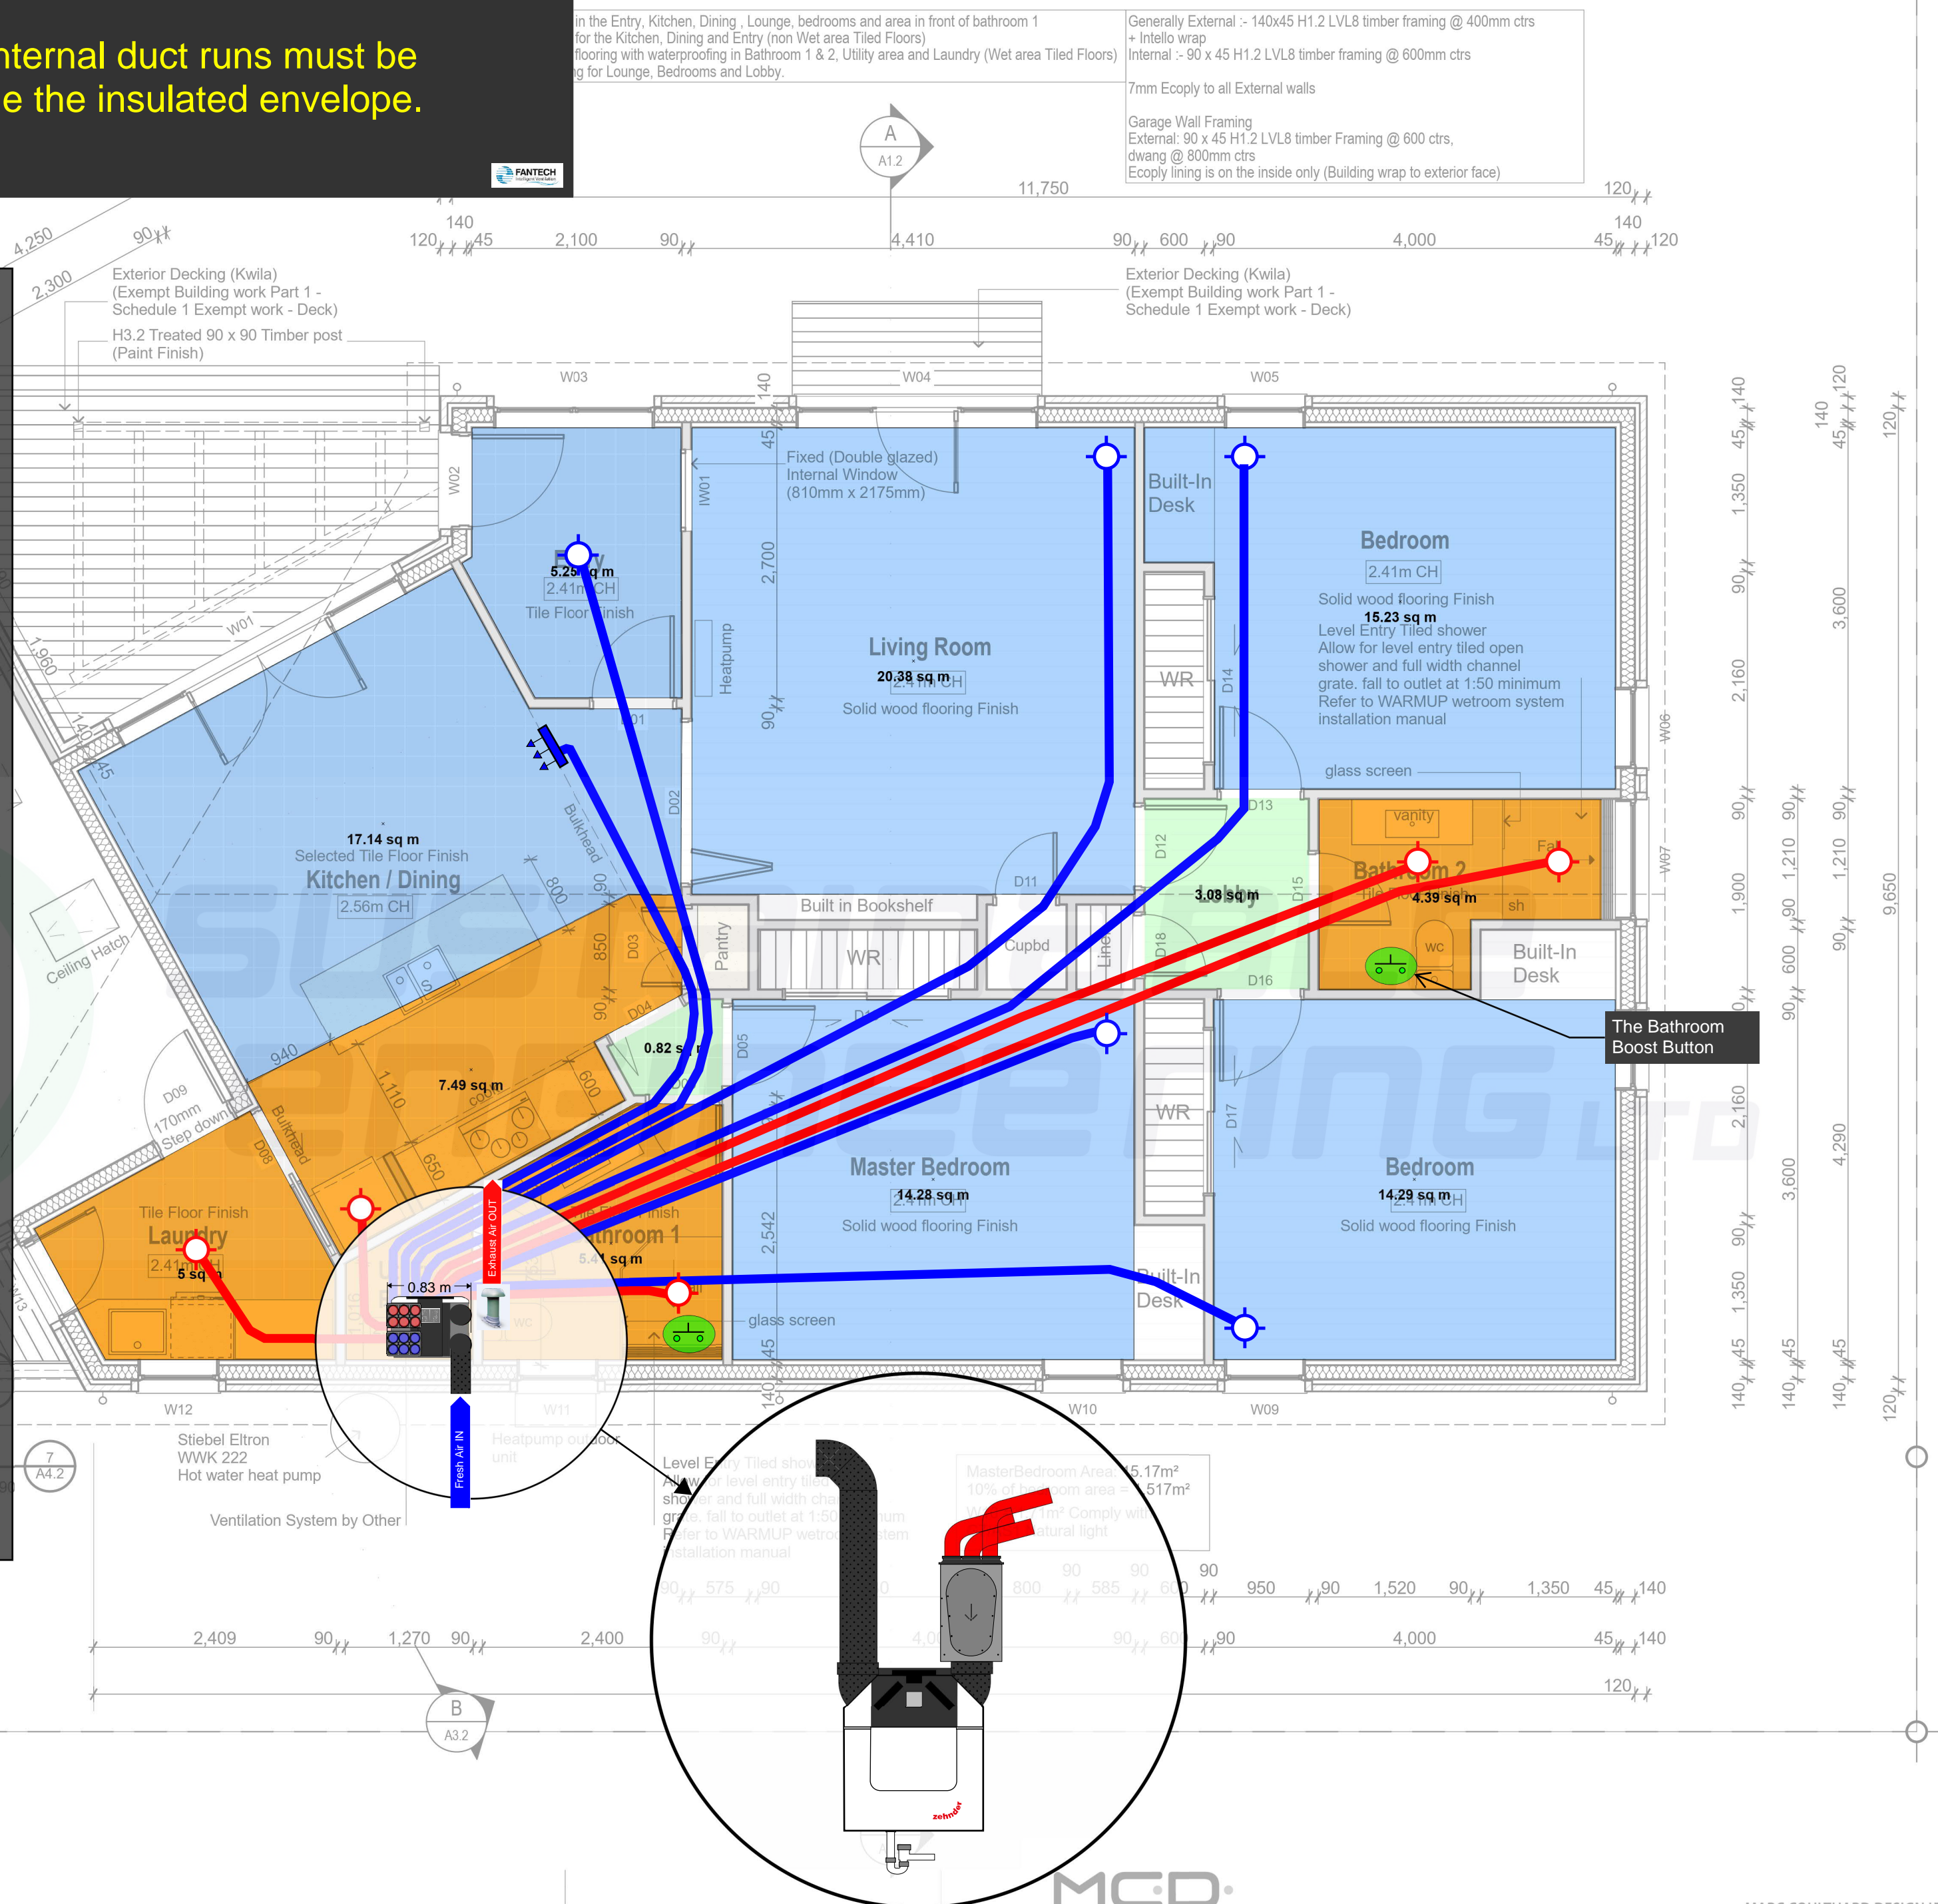

Martin Residence