


IMPROVED THERMAL CONDUCTIVITY

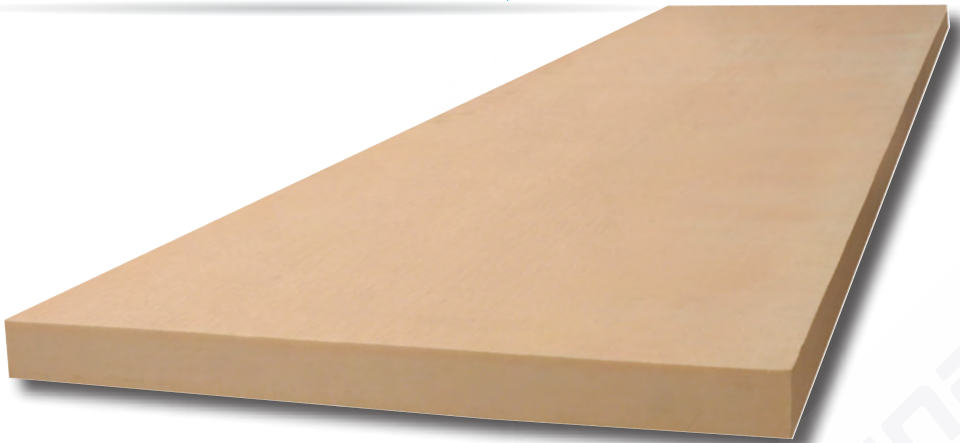

September 2014

Climaflex® XPS Board

For edge beams, green roofs, slabs
and cool rooms

Description

Climaflex XPS Board is a rigid extruded polystyrene (XPS) board with Zero Ozone Depletion Potential (ODP). The boards are lightweight with a high compressive strength and are available in ship lap or tongue and groove edges.

Application

Climaflex XPS Board can be used for the thermal insulation of:

Flat Roofs:

- in an inverted roof below ballast or paving slabs
- in a green/garden roof
- in a flat roof with a single ply membrane

Concrete Slabs:

- around trenches
- in between pods
- edge beams

Cool Rooms:

- refrigeration
- trucks

Thermal

The thermal conductivity of Climaflex XPS Board is 0.027W/mK

Performance

- Excellent thermal performance
- High compressive strength
- Highly resistant to water absorption
- Lightweight and easy to install
- Tough and durable, not easily damaged
- Dimensionally stable

ClimaFoam® XPS Board

Standards

ClimaFoam XPS Board is manufactured in accordance with BS EN 13164, EN 16001 Energy Management Systems, OHSAS 18001 Occupational Health and Safety Management Systems, ISO 14001 Environmental Management Systems, and ISO 9001 Quality Management Systems, as certified by Bureau Veritas.

Durability

The continuous service temperature limit of ClimaFoam XPS Board is up to +70°C.

Environmental

ClimaFoam XPS Board has zero Ozone Depletion Potential (ODP) and is 100% recyclable.

Compressive strength

ClimaFoam XPS Board is highly resistant to compression and withstands both occasional and long term static loads. The high compressive strength and rigidity of the boards allows a range of ballast materials including gravel, soil and concrete slabs to be used as part of the construction. Load bearing construction elements should be designed to adequately support the combination of imposed and dead loads without creating excessive deflection.

Vapour resistivity

The water vapour resistivity of ClimaFoam XPS Board is 625MN/g.m when tested in accordance with ASTM E96-2010.

Moisture absorption

ClimaFoam XPS Board has a moisture absorption 0.6% by volume when tested in accordance with ASTM C 272 and can be laid in standing water or up against wet concrete with negligible impact on the performance of the product.

Handling and storage

ClimaFoam XPS Board is easy to handle and install. Ensure the board product is not stored close to open flames or other ignition sources and avoid volatile organic compounds and chemicals such as solvents. ClimaFoam XPS Board should not be left exposed to prolonged sunlight as this will result in surface degradation.

ClimaFoam® XPS Board

Thickness (mm)	Thermal conductivity (W/mK)	R-Value (m ² K/W)	Length (mm)	Width (mm)	Joint Type	Compressive strength (kPa)
ClimaFoam XPS Board - 1200mm wide						
30	0.027	1.1	2200	1200	Shiplap	300
40	0.027	1.5	2200	1200	Shiplap	300
50	0.027	1.8	2200	1200	Shiplap	300
75	0.027	2.8	2200	1200	Shiplap	300
100	0.027	3.7	2200	1200	Shiplap	300
30	0.027	1.1	2200	1200	T&G	300
40	0.027	1.5	2200	1200	T&G	300
50	0.027	1.8	2200	1200	T&G	300
75	0.027	2.8	2200	1200	T&G	300
100	0.027	3.7	2200	1200	T&G	300

Knauf Insulation Pty Ltd

Building 1, Unit 2, 15 Accent Drive
East Tamaki, Auckland, 2013

Customer Service (Sales)

Tel: 0800 562 834
Tel: +61 7 3393 7300
Fax: +61 7 3902 0613
Email: orders.nz@knaufinsulation.com

Technical Advisory Centre

Email: tech.nz@knaufinsulation.com

knaufinsulation.co.nz